

Keep this manual for future reference. If you sell or give this stroller away, make sure you give this manual to the new owner.

Ask them to read instructions completely.

SB150 STROLLER/FRAME CARRIER SB150 Operating Instructions

Important: Read and follow these Safety Rules and Assembly Instructions before operating stroller/frame carrier. If you have any questions concerning the safe use of this product, contact InSTEP, LLC at 1-800-242-6110, M-F, 8:00 a.m. - 5:00 p.m. CST or visit our web site at www.instep.net or e-mail us at info@instep.net before using.

Safety Rules:



WARNING: Failure to follow these warnings and assembly instructions could result in serious injury or death.



WARNING: Immediately discard any plastic wrapping.



WARNING: Never allow children to fold, assemble or disassemble the stroller/frame carrier.



WARNING: Do not use stroller until your child is old enough to hold his/her head up on his/her own.



WARNING: Maximum weight capacity for a child in this stroller is 30 lbs. or 13.6 kg.



WARNING: Avoid serious injury from falling or sliding out. Always use seatbelt and shoulder harness.



WARNING: Never leave child unattended.



WARNING: Never use this stroller/frame carrier with roller skates or in-line skates.



WARNING: Never allow this stroller/frame carrier to be used as a toy or allow children to give rides to others.



WARNING: Never use stroller/frame carrier if it becomes damaged.



WARNING: Always be aware of traffic around you when walking.



WARNING: Always engage brakes when you stop or when you let go of handle.



WARNING: Accessories or parcels placed in or on the stroller may cause it to become unstable.



WARNING: Maximum weight for objects in back pouch is 2.2 lbs. or 1 kg. Excessive weight may cause a hazardous unstable condition.



WARNING: For child's safety it is best to have another adult help you put on the pack while child is in it. Make sure the child is securely strapped in with both shoulder straps and waist strap prior to putting on the pack.

IMPORTANT

We appreciate your purchase of one of our many fine products. We are sure that you will be satisfied with your selection. We regret that although great care and effort have been taken, occasionally problems may occur. PLEASE DO NOT RETURN PRODUCT TO THE STORE. To ensure prompt and correct handling of problems, or to answer questions, please contact us at either our Toll-Free Customer Service Number or e-mail us at our number listed below. Service will be quicker if you have your model number (found on the product and box) along with this instruction sheet ready when calling. If you have any questions concerning the safe use of this product, Please contact us 1-800-242-6110 press "1" for customer service and then "2" to speak to a representative or e-mail us at info@instep.net or visit our web site at www.instep.net.

SB150 Assembly Instructions


Parts List


<u>Description</u>	Qty.	Description	Qty.
Frame assembly with seat,		Rear Wheel	2
belly bar and front wheels	1	Rear Axle	1
Canopy	1	Retaining clips for axles (white)	2
Front wheel bootie	2	Caps to cover retaining clips (black)	2

Stroller Assembly Instructions

Step 1. Unfold Stroller

Grasp padded handle and lift up, the stroller will begin to unfold. Raise handle until the side latches snap onto the locking pegs (Picture A). Check side latches to ensure they are locked in place; if they are not locked in place push down on latches (Picture B). Lift up on the front belly bar until it snaps into place (Picture C).

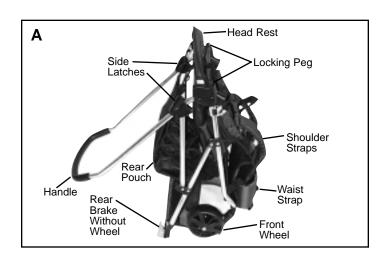

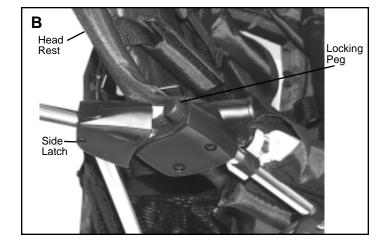



To lower belly bar pull forward on the spring loaded latches (located on each side of the belly bar) then tilt down (Picture D).


Step 2. Rear Wheel Asembly


Push the wide end of the white retaining clip onto one end of the axle until it snaps into the groove. Press black cap onto retaining clip. Slide one rear wheel on the axle and insert the other end of the axle through both of the rear support holes (Picture E). Place the other rear wheel onto the axle (Picture F). Snap the retaining clip onto the axle then press on black cap onto clip (Picture G).


Step 3. Canopy Assembly


Place the canopy so that the rounded edge is positioned behind the headrest, then snap it onto the back of the headrest. Bend the canopy and snap both sides onto the belly bar (Picture H).

Assembly is now complete!

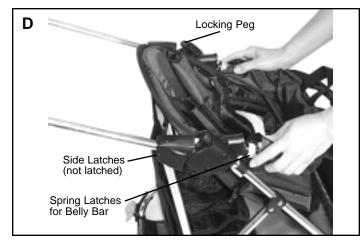

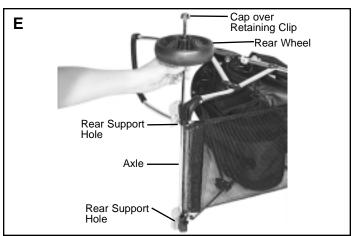

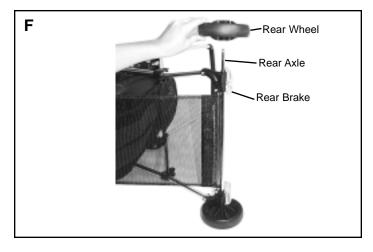

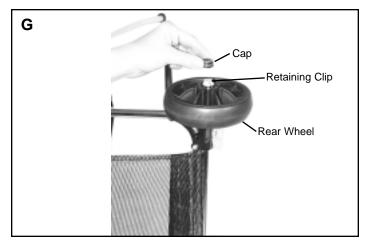




Use Instructions


To close stroller:

Pull back on the side latches until they clear the locking pegs. The stroller will automatically fold when handle is pushed down or when the stroller is lifted off the ground (Picture I).

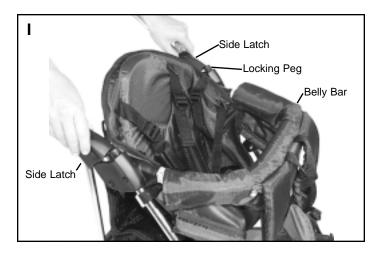

To engage rear brakes:


Step lightly on the levers next to the rear wheels until the cogs of the brakes engage the cogs of the wheel. Repeat on other side. To release brake, lift levers with toe until cogs disengage (Picture J).

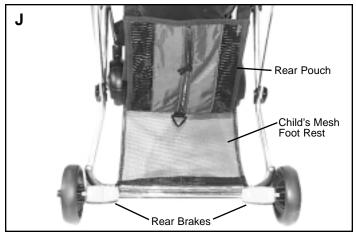

Proper use of seat height adjustment, shoulder straps and waist strap:

WARNING: Avoid Serious Injury from falling or sliding out. Always use seat belts

- 1. Place child in seat. Adjust the seat height by pulling or loosening straps located on the sides (Picture K).
- 2. Buckle waist strap around child's waist and adjust to a snug fit (Picture K).
- 3. Make sure crotch strap buckle is between the child's legs, adjust length by sliding strap through plastic slide. Place shoulder straps over child's shoulders and buckle into center crotch buckle. Adjust shoulder straps to a snug fit by sliding strap through plastic slide (Picture L). Replace padded covers over the shoulder straps.

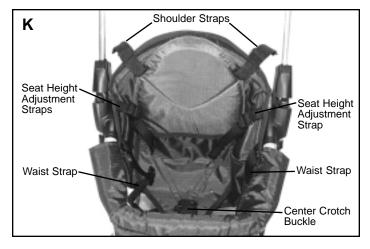





To convert stroller to a frame carrier

WARNING: Please request the help of another adult to help you put the frame carrier on.

- With rear wheels locked, release the frame carrier waist strap cover located between the front legs.
- 2. Tilt the stroller back slightly, and slide the booties onto the front wheels. This will prevent your clothes being soiled by the wheels.
- 3. Release the waist buckle and sternum (chest) buckle (Picture M).
- 4. To close the stroller, step behind the stroller, pull back on the side latches until they clear the locking pegs, handle will automatically fold down when stroller/carrier is lifted off the ground.
- 5. With the help of another adult to steady the child in the seat, stand in front of the carrier. Place one arm through the shoulder strap and lift carrier onto your shoulder/back. You will find this much easier if the other adult also assists you with holding the other shoulder strap and guiding it over your other shoulder.
- Once both shoulder straps are on, pull down on the shoulder strap ends to tighten. This will position the child higher onto your shoulders (Picture N).
- Adjust the height of the sternum straps by sliding them up or down. Clasp the sternum buckle. Pull the ends of the sternum straps to tighten (Picture N).
- 8. Buckle the waist strap and pull end of the waist strap to tighten (Picture N).

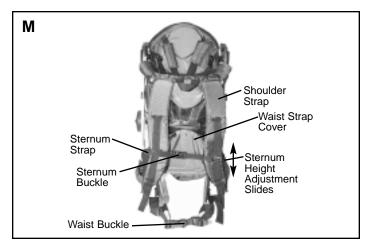

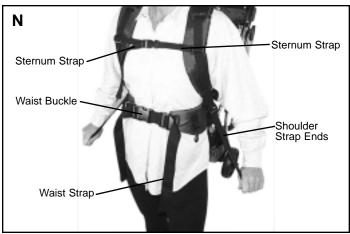

Care and Maintenance

Check fasteners

After one hour of use, check all fasteners to make sure they are secure. Adjust if necessary. Periodically check the stroller to ensure that it is in good operating condition.

To clean seat.

If cleaning is required, use a soft cloth with warm water and mild soap; air dry. DO NOT BLEACH.

To clean canopy:

Spot clean using a soft cloth with warm water and mild soap. DO NOT BLEACH. Do not put in a washing machine.

To clean frame:

Wipe using a soft cloth with warm water and mild soap. Air dry. DO NOT USE polish or harsh abrasives.



**WARNING: If you have any questions concerning the safe use of this product, please contact InSTEP, LLC before using.

1-800-242-6110

8am-5pm CST, Monday-Friday, or MAIL to:



314 West 86th Street Bloomington, MN 55420 Tel: 1-800-242-6110

or visit our web site at www.instep.net email: info@instep.net